

CRYSTAL OSCILLATOR UNIT WITH HCMOS OUTPUT IN METAL CAN DIP-14 PACKAGE, SIZE 20 X 13MM WITH 4 PINS.


CO1

PRODUCT FEATURES

- OSCILLATOR IN DIP-14 PACKAGE SIZE 20 X 13 X 5MM WITH 4 PINS.
- FREQUENCY RANGE 30KHZ TO 160MHZ.
- STANDBY FUNCTION AVAILABLE (E/D = OUTPUT TRISTATE).
- LOW JITTER AND PHASE NOISE.

APPLICATIONS

- CPU, GRAPHICS CARD
- ETHERNET, ADSL
- AUDIO & VIDEO EQUIPMENT
- NTSC / PAL ENCODERS

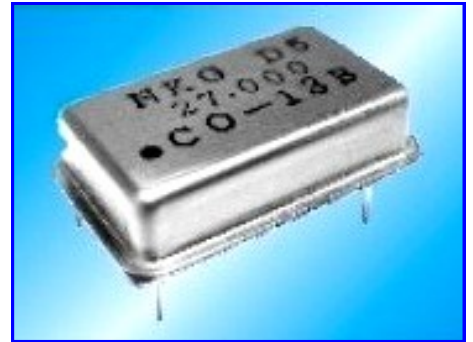

PRODUCT SPECIFICATIONS

PARAMETER	SYMBOL	PARAMETER VALUES / LIMITS	CONDITIONS / REMARKS								
NOMINAL FREQUENCY	F_N	30kHz ~ 160MHz	FUNDAMENTAL OR OVERTONE DESIGN								
SUPPLY VOLTAGE RANGE	V_{DD}	1.0V / 1.2V / 1.8V / 2.5V / 3.3V / 5.0V	SEE OPTIONS TABLE ON PAGE 2 FOR DETAILS								
SUPPLY CURRENT CONSUMPTION	I_{DD}	5 ~ 40mA	SEE NOTE 1								
OVERALL FREQUENCY STABILITY	$\Delta f/F_N$	± 20 PPM, ± 25 PPM, ± 50 PPM	SEE NOTE 2, OTHERS AVAILABLE								
OPERATING TEMPERATURE RANGE	T_{OP}	$-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$ OR $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$	OTHER OPTIONS AVAILABLE								
AGING FIRST YEAR	$(\Delta f/F_N)y1$	± 5 PPM	@+25°C								
OUTPUT WAVEFORM / LOAD	— / C_L	HCMOS / 15PF TYP, 30PF MAX	DEPENDING ON SUPPLY VOLTAGE & FREQ.								
OUTPUT VOLTAGE LEVELS	V_{OH} / V_{OL}	$\geq 90\%V_{DD}$ / $\leq 10\%V_{DD}$	—								
RISE AND FALL TIMES	t_R AND t_f	<table border="1"> <tr> <td>≤ 6ns</td> <td>$V_{DD}=1.8$V</td> <td>≤ 8ns</td> <td>$V_{DD}=3.3$V</td> </tr> <tr> <td>≤ 7ns</td> <td>$V_{DD}=2.5$V</td> <td>≤ 10ns</td> <td>$V_{DD}=5.0$V</td> </tr> </table>	≤ 6 ns	$V_{DD}=1.8$ V	≤ 8 ns	$V_{DD}=3.3$ V	≤ 7 ns	$V_{DD}=2.5$ V	≤ 10 ns	$V_{DD}=5.0$ V	@20%~80%~20% V_{DD}
≤ 6 ns	$V_{DD}=1.8$ V	≤ 8 ns	$V_{DD}=3.3$ V								
≤ 7 ns	$V_{DD}=2.5$ V	≤ 10 ns	$V_{DD}=5.0$ V								
OUTPUT SYMMETRY (DUTY CYCLE)	DC	40/60% OR 45/55%	@50% V_{DD}								
ENABLE/DISABLE FUNCTION PIN 1 TRISTATE FUNCTION (SEE OPTIONS)	E/D	PIN1 = HIGH OR OPEN -> OUTPUT PIN3 ACTIVE PIN1 = LOW -> OUTPUT PIN3 HIGH IMPEDANCE	<ul style="list-style-type: none"> • OUTPUT HIGH IMPEDANCE = TRI-STATE • PIN1 CAN BE LEFT OPEN = FLOATING 								
STANDBY CURRENT CONSUMPTION	I_{STB}	10 μ A	TYPICAL								

NOTE 1: CURRENT CONSUMPTION VARIES BY SUPPLY VOLTAGE, SEE OPTIONS TABLE ON PAGE 2 FOR MORE DETAILS.

NOTE 2: OVERALL FREQUENCY STABILITY INCLUDES TOLERANCE @+25°C, DEVIATIONS OVER OPERATING TEMPERATURE RANGE, DEVIATIONS DUE TO OUTPUT LOAD VARIATIONS AND SUPPLY VOLTAGE FLUCTUATIONS.

MECHANICAL DIMENSIONS

PIN	FUNCTION
1	ENABLE / DISABLE [E/D] * or N.C.
7	GROUND [GND]
8	RF OUTPUT [CLK]
14	SUPPLY VOLTAGE [Vdd]

* Check for part numbers to determine one that has this function is available.

Notes:
The metal case is connected to pin 7 and therefore grounded (GND).
h The package height may vary depending on design, check specification sheet for information.


Metal can DIP-14 oscillator package
20x13mm with 4 pins
DIP14CO-P4 2017-09 C
No scale Unit: mm

CRYSTAL OSCILLATOR UNIT WITH HCMOS OUTPUT IN METAL CAN DIP-14 PACKAGE, SIZE 20 X 13MM WITH 4 PINS.


CO1

ENVIRONMENTAL COMPLIANCE INFORMATION

- ROHS 6/6 COMPLIANT (DIRECTIVE 2011/65/EC) AND LEAD-FREE.
- COMPLIANT TO ROHS 2/3 (DIRECTIVE 2015/863) (ALSO CALLED ROHS 10).
- PRODUCT DOES NOT CONTAIN PVC (POLYVINYL CHLORIDE).
- PRODUCT DOES NOT CONTAIN PFOS/PFOA NOR BEING SAME USED TO MANUFACTURE THE COMPONENTS OF THIS PRODUCT.
- MOISTURE SENSITIVITY LEVEL (MSL) 1 PER J-STD-020C.

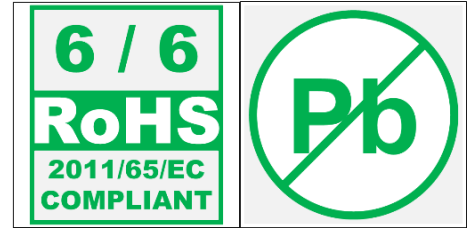

SOLDERING RECOMMENDATIONS

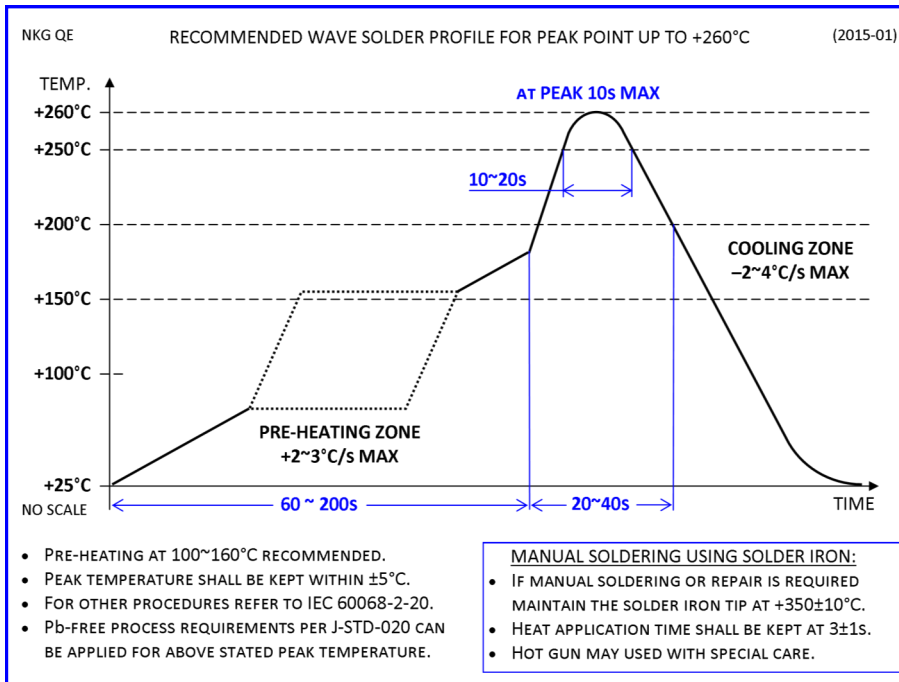

PACKAGING INFORMATION

- PACKAGING IN ANTISTATIC TUBES.
- QTY PER TUBE: 25PCS
- ALTERNATE PACKAGING IN PLASTIC TRAYS AND FOAM TRAY IS AVAILABLE.


AVAILABLE OPTIONS

PARAMETER	SYMBOL	CO12	CO13	CO15	CO16	CO18	CO19	CO14	CO17	CO1D	CO1C	
FREQUENCY RANGE	F _N	30k ~ 100MHZ			30kHz ~ 160MHZ				750k ~ 50MHZ			
SUPPLY VOLTAGE	V _{DD}	5.0V			3.3V		2.5V		1.8V		1.2V	1.0V
SUPPLY CURRENT (MAX)	I _{DD}	<40mA			<35mA		<20mA		<15mA		<5mA	<5mA
STANDBY FUNCTION (TRISTATE)	E/D	NONE	YES	NONE	YES	NONE	YES	NONE	YES	YES	YES	

PART NUMBER SYNTAX

- PART NUMBER FAMILY (REPRESENTS MODEL WITH HCMOS OUTPUT AND PACKAGE SIZE)
- SUPPLY VOLTAGE NOMINATOR (I.E. 2=5V, 5= 3.3V, 7= 1.8V, 8= 2.5V, SEE OPTIONS TABLE)
- FREQUENCY STABILITY CODE (I.E. A= ±25PPM, B= ±50PPM, C= ±100PPM, D= ±30PPM)
- NOMINAL FREQUENCY (IN MHZ WITH AT LEAST FOUR DIGITS AFTER DECIMAL POINT)
- OPERATING TEMPERATURE RANGE CODE (I.E. E= -20~70°C, M= -10~70°C, W= -40~85°C)
- OUTPUT SYMMETRY INDICATOR (N= 40/60%, T= 45/55%)
- OUTPUT LOAD DESIGNATOR (I.E. S= STANDARD 15PF, C= 20PF, D= 25PF, E= 30PF, G= 50PF)
- PART NUMBER EXTENSION (ONLY FOR NON-STANDARD OR CUSTOMIZED PARTS)

CO16B25.0000MNS-EXT

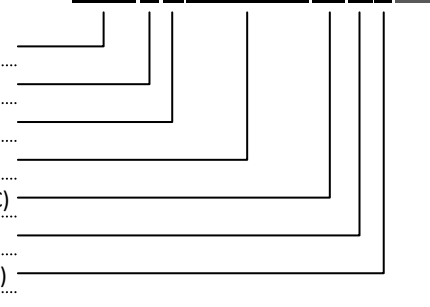

IF THERE IS A LARGE NUMBER OF CODES IN USE THE TABLE ABOVE MAY ONLY SHOW A FEW EXAMPLES.

FOR MORE INFORMATION PLEASE CONTACT US.

HONG KONG:
NAKAGAWA ELECTRONICS LIMITED
☎ +852 2389 9201 ✉ sales@nkg.com.hk
☎ +852 2341 0001 🌐 www.nkg.com.hk

China Shenzhen office:
深圳中川晶体电子有限公司
☎ +86(0)755 2598 2648 ✉ sales_sz@nkg.cn
☎ +86(0)755 2598 2390 🌐 www.nkg.com.hk

China Suzhou office:
中川电子(苏州)有限公司
☎ +86(0)512 8818 7890 ✉ sales_nm@nkg.cn
☎ 🌐 www.nkg.com.hk