

QUARTZ CRYSTAL UNIT IN CERAMIC GLASS SEAL SMD PACKAGE, SIZE 6.0 X 3.5MM.


S6GA

PRODUCT FEATURES

- SMALL PACKAGE SIZE 6.0 X 3.5 X 1.2MM WITH 2 PADS.
- LOW COST ALTERNATIVE TO COMMON SEAM SEAL PACKAGES.
- AUTOMOTIVE GRADE COMPLIANT TO AEC-Q200 IS AVAILABLE.
- ROHS COMPLIANT BY EXEMPTION.

APPLICATIONS


- COMPUTER PERIPHERALS
- OFFICE AUTOMATION
- SET-TOP BOX, TV SETS
- AUDIO & VIDEO

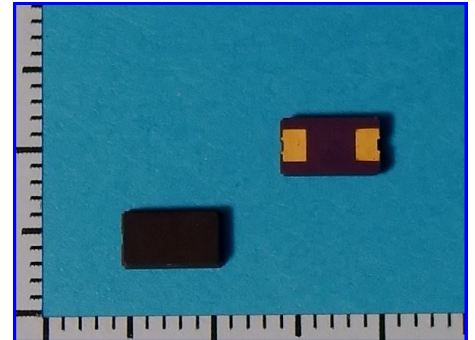

PRODUCT SPECIFICATIONS

PARAMETER	SYMBOL	SPECIFICATIONS	REMARKS
FREQUENCY RANGE	F_N	8.0 ~ 60.0MHZ	FUNDAMENTAL UP TO 54MHZ
OPERATION MODE	—	FUNDAMENTAL / 3RD OVERTONE	OVERTONE ABOVE 40MHZ
FREQUENCY TOLERANCE	$\Delta f/f$	± 20 PPM, ± 30 PPM, ± 50 PPM	OTHER OPTIONS AVAILABLE
STABILITY OVER OPERATING TEMP.	T_C	± 20 PPM, ± 30 PPM, ± 50 PPM	DEPENDING ON OPERATING TEMPERATURE RANGE
OPERATING TEMPERATURE RANGE	T_{OP}	$-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ OR $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$	OTHER OPTIONS AVAILABLE
LOAD CAPACITANCE	CL	8 TO 32PF OR SERIES	PLEASE SPECIFY LOAD CAPACITANCE
EQUIVALENT SERIES RESISTANCE	ESR	80 Ω MAX 60 Ω MAX 55 Ω MAX 50 Ω MAX 100 Ω MAX	FUND MODE 8 ~ 10MHZ FUND MODE 10 ~ 16MHZ FUND MODE 16 ~ 20MHZ FUND MODE 20 ~ 54MHZ 3RD OT MODE 40 ~ 60MHZ
DRIVE LEVEL	DL	100 μW TYP, 300 μW MAX	—
AGING FIRST YEAR	$\Delta f/y_1$	± 3 PPM	@+25 $^{\circ}\text{C}$

MECHANICAL DIMENSIONS

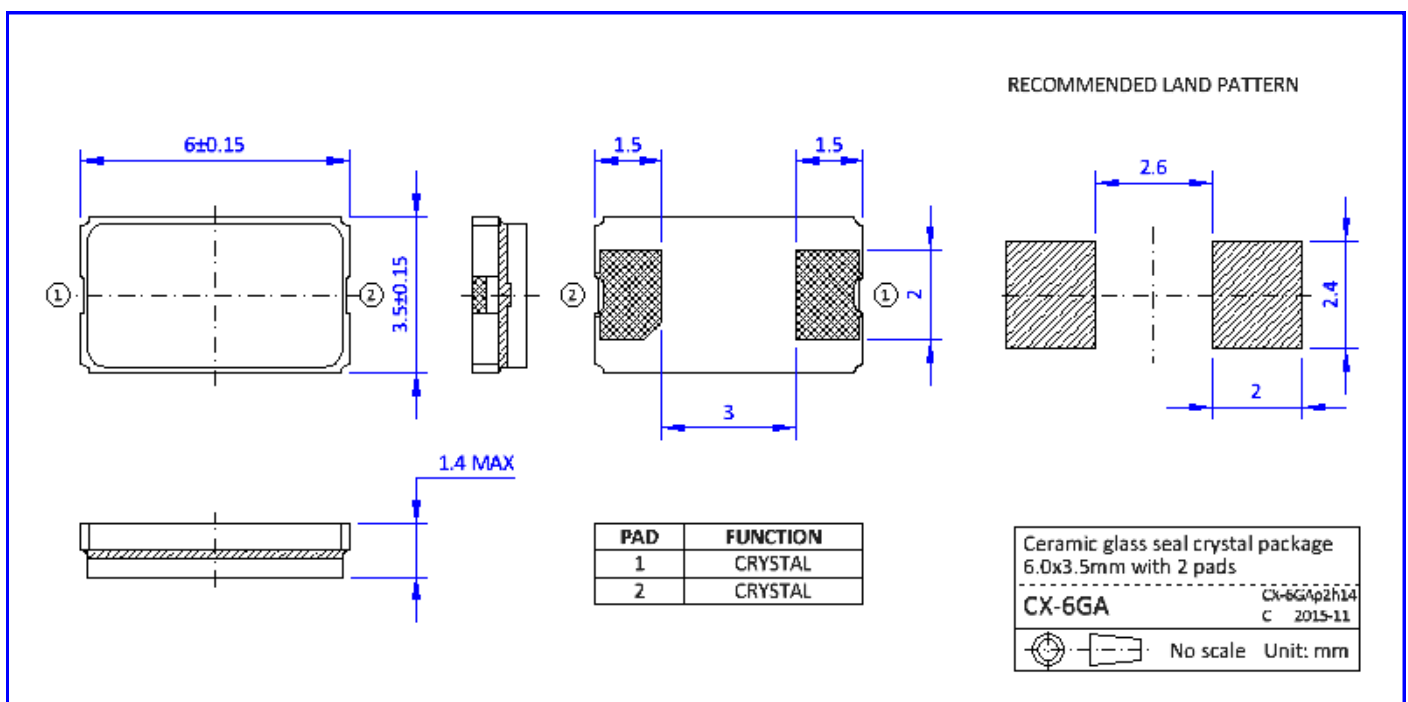

QUARTZ CRYSTAL UNIT IN CERAMIC GLASS SEAL SMD PACKAGE, SIZE 6.0 X 3.5MM.


S6GA

ENVIRONMENTAL COMPLIANCE INFORMATION

- ROHS 6/6 COMPLIANT (DIRECTIVE 2011/65/EC) BY EXEMPTION 7(c)-1.
- COMPLIANT TO ROHS 2 (DIRECTIVE 2015/863) (ALSO CALLED ROHS 10).
- HALOGEN-FREE PER DEFINITION OF IEC 61249-2-21 2033.
- NONE-USE OF SVHCS PER REACH IS CURRENTLY GIVEN, CONTINUOUSLY MONITORED AND UPDATED AS THE COMMISSION ISSUES NEW RELEASES.
- PRODUCT DOES NOT CONTAIN ANY PHTHALATES (PHS).
- PRODUCT DOES NOT CONTAIN PVC (POLYVINYL CHLORIDE).
- PRODUCT DOES NOT CONTAIN PFOS/PFOA NOR BEING SAME USED TO MANUFACTURE THE COMPONENTS OF THIS PRODUCT.
- MOISTURE SENSITIVITY LEVEL (MSL) 1 PER J-STD-020C.




SOLDERING RECOMMENDATIONS

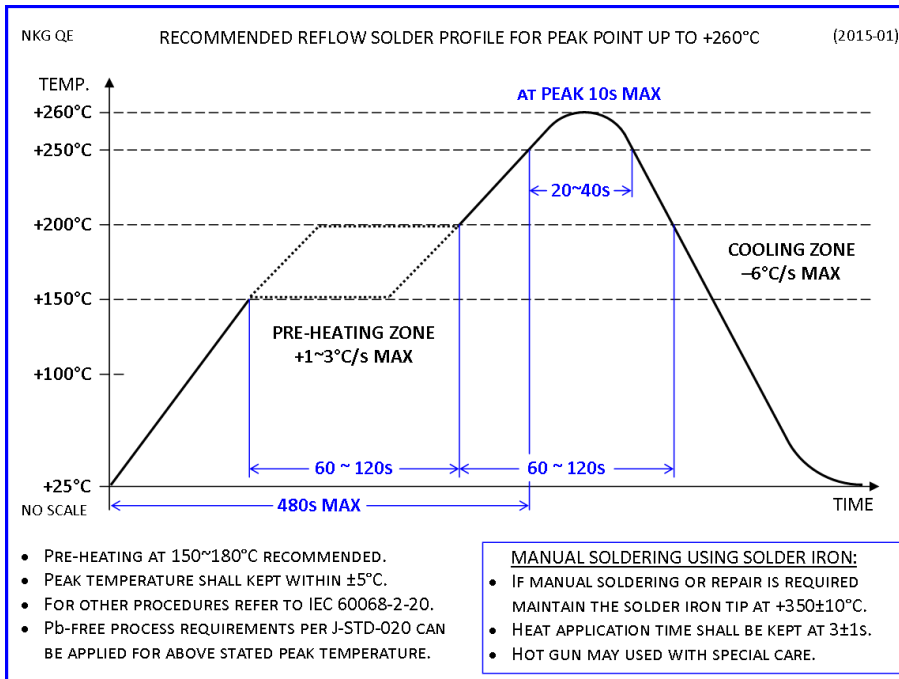

PACKAGING INFORMATION

- PACKAGING IN TAPE & REEL IN COMPLIANCE TO EIA-481.
- QTY PER REEL: 1,000PCS
- REEL DIA A=180MM.
- EMBOSSED CARRIER TAPE WIDTH W = 12MM.
- COMPONENT PITCH P1 = 8MM.

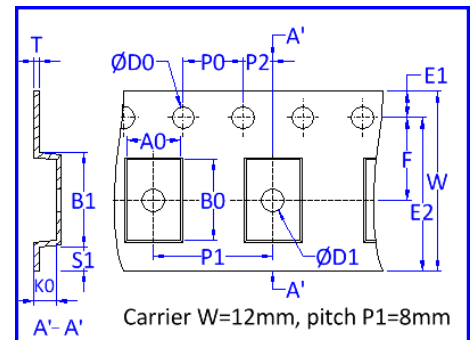

PART NUMBER SYNTAX

- PART NUMBER FAMILY (REPRESENTS PRODUCT MODEL AND PACKAGE SIZE / TYPE)
- NOMINAL FREQUENCY (IN MHZ WITH AT LEAST FOUR DIGITS AFTER DECIMAL POINT)
- OPERATION MODE CODE (F = FUNDAMENTAL / T = 3RD OVERTONE)
- LOAD CAPACITANCE (ACTUAL VALUE OR "00" FOR SERIES)
- OPERATING TEMPERATURE RANGE CODE (I.E. C= -10~60°C, E= -20~70°C, M= -40~85°C)
- FREQUENCY TOLERANCE DESIGNATOR (I.E. 2=20PPM, 3=30PPM, Y=15PPM, Z=25PPM)
- FREQUENCY STABILITY DESIGNATOR (I.E. 5=50PPM, 0=100PPM, Y=15PPM, Z=25PPM)
- PART NUMBER EXTENSION (ONLY FOR NONE-STANDARD OR CUSTOMIZED PART)

S6GA25.0000 F 18 E 25 -EXT

FOR MORE INFORMATION PLEASE CONTACT US.

HONG KONG:

NAKAGAWA ELECTRONICS LIMITED

+852 2389 9201 sales@nkg.com.hk
+852 2341 0001 www.nkg.com.hk

China Shenzhen office:

深圳中川晶体电子有限公司

+86(0)755 2598 2648 sales_sz@nkg.cn
+86(0)755 2598 2390 www.nkg.com.hk

China Suzhou office:

苏州纳美电子有限公司

+86(0)512 8818 7890 sales_nm@nkg.cn
+86(0)512 8818 7889 www.nkg.com.hk